

RUNTAL SPIRALE




runtal

RUNTAL SPIRALE TECHNICAL SPECIFICATIONS

CENTRAL HEATING VERSION



FRONT VIEW




SIDE VIEW




TOP VIEW


ELECTRIC ONLY VERSION



FRONT VIEW



SIDE VIEW



TOP VIEW

- H Height (mm)
- N Pipe centres (mm)
- ⊙ Electric immersion

RUNTAL SPIRALE

CENTRAL HEATING VERSION

Height 650 mm	Diameter mm	N mm	V dm ³	M kg	n	P ΔT 50K Watt	Surface (Code)
SPIR-060-020	200	60	4.5	10	1.27	310	RAL9016 (0603)
SPIR-060-020-BK	200	60	4.5	10	1.27	310	Matt black (0433)
SPIR-060-020-ML	200	60	4.5	10	1.27	310	Metallica (0434)
SPIRC-060-020	200	60	4.5	10	1.27	248	Chrome (0790)

Height 1250 mm	Diameter mm	N mm	V dm ³	M kg	n	P ΔT 50K Watt	Surface (Code)
SPIR-120-020	200	60	6.4	14	1.27	620	RAL9016 (0603)
SPIR-120-020-BK	200	60	6.4	14	1.27	620	Matt black (0433)
SPIR-120-020-ML	200	60	6.4	14	1.27	620	Metallica (0434)
SPIRC-120-020	200	60	6.4	14	1.27	496	Chrome (0790)

Height 1550 mm	Diameter mm	N mm	V dm ³	M kg	n	P ΔT 50K Watt	Surface (Code)
SPIR-150-020	200	60	8.0	18	1.27	833	RAL9016 (0603)
SPIR-150-020-BK	200	60	8.0	18	1.27	833	Matt black (0433)
SPIR-150-020-ML	200	60	8.0	18	1.27	833	Metallica (0434)
SPIRC-150-020	200	60	8.0	18	1.27	666	Chrome (0790)

Height 1850 mm	Diameter mm	N mm	V dm ³	M kg	n	P ΔT 50K Watt	Surface (Code)
SPIR-180-020	200	60	9.6	21	1.27	1047	RAL9016 (0603)
SPIR-180-020-BK	200	60	9.6	21	1.27	1047	Matt black (0433)
SPIR-180-020-ML	200	60	9.6	21	1.27	1047	Metallica (0434)
SPIRC-180-020	200	60	9.6	21	1.27	837	Chrome (0790)

N: pipe centres, V: volume, M: weight, n: exponent, P ΔT 50K: EN442 output

ELECTRIC ONLY VERSION

Height 650 mm	Diameter mm	M kg	EP Watt	Surface (Code)
SPIRE-060-020-ML	200	15	200	Metallica (0434)
SPIREC-060-020	200	15	200	Chrome (0790)

Height 1250 mm	Diameter mm	M kg	EP Watt	Surface (Code)
SPIRE-120-020-ML	200	20	400	Metallica (0434)
SPIREC-120-020	200	20	400	Chrome (0790)


Height 1550 mm	Diameter mm	M kg	EP Watt	Surface (Code)
SPIRE-150-020-ML	200	26	500	Metallica (0434)
SPIREC-150-020	200	26	500	Chrome (0790)

Height 1850 mm	Diameter mm	M kg	EP Watt	Surface (Code)
SPIRE-180-020-ML	200	30	600	Metallica (0434)
SPIREC-180-020	200	30	600	Chrome (0790)

M: weight, EP: electric power

TECHNICAL DATA


Materials	Steel Ø 26 mm tube, chrome-plated (0790) or powder-coated in white RAL9016 (0603), metallic (0434) or matt black (0433)
Operating pressure	Max. 8.0 bar
Test pressure	12.0 bar
Operating temperature	Max. 95°C
Standard kit	Brackets in the finish of the radiator, screws and plugs, ½" air vent included in the packaging
Connections	With the standard Ø ½" connections with internal thread, the following types of connections are possible. Flow ▲ /return ▼ at choice on left- or right-hand at bottom opposite side, Ø ½" air vent (E)




NB: The connection must be made in accordance with the required specifications

Electric-only model	Degree of protection: Class II IP44 (splash water) with CE-marking Mains voltage: 230 V, 50 Hz +/- 10 %
Valves	As per ACCESSORIES price list
Normes	CE, EN442


RUNTAL SPIRALE MOUNTING INSTRUCTIONS

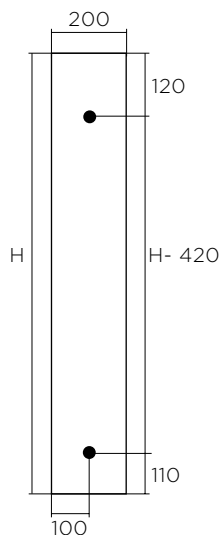


Height (650mm)

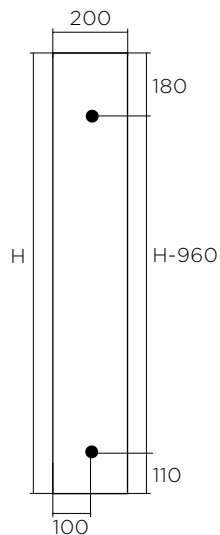

Height (1250mm)

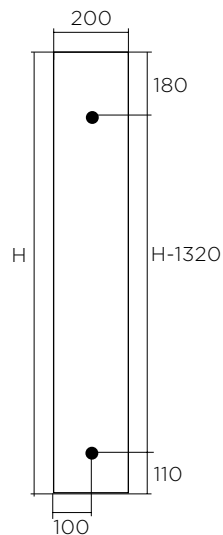

Height (1550mm)

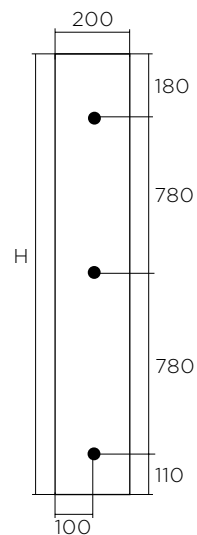

Height (1850mm)

H Height (mm)
● Fixing point

For correct installation, please note the corresponding installation instructions

ZEHNDER GROUP INTERNATIONAL SALES

Almweg 34, DE-77933 Lahr
T +49 7821 586-392, F +49 7821 586-406
International.sales@zehndergroup.com
www.runtal.com

A member company of the Zehnder Group.

